




outbackchair  
company

# The freedom to float

## hammockstand

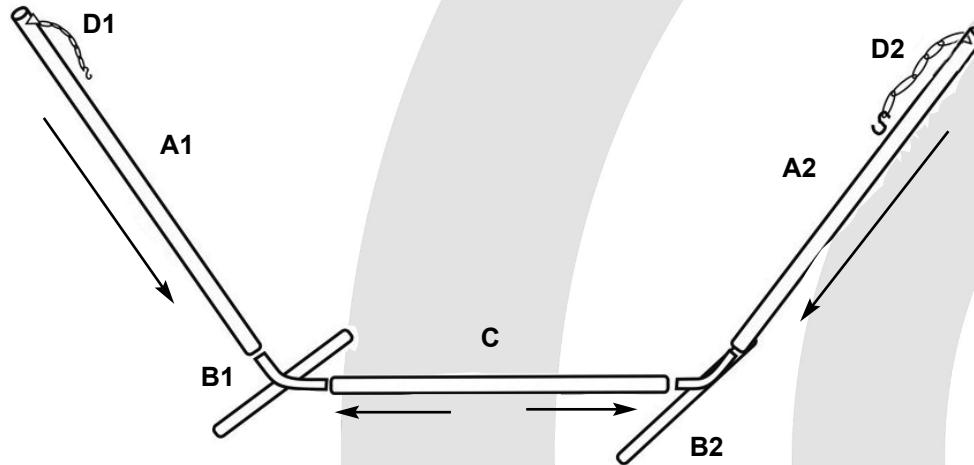

### ASSEMBLY INSTRUCTIONS

1. Locate the 7 separate parts: 2 side poles (A1, A2), 2 base brackets (B1, B2), center pole (C) and 2 chains (D1, D2).
2. Place the "c" pole between B1 and B2 to create the base of the stand. Then firmly insert C into B1 and B2
3. Take A1 pole and insert it into the exposed end of B1, making certain that the triangle hook faces directly inward. Likewise, Insert A2 into B2.
4. Make sure the triangle hooks face directly inward and that all the poles are secure and tightly seated into each other.
5. If needed, use the set of chains with the closed end "S" hooks by connecting them onto the triangle hooks on the ends of A1 and A2.

**Disclaimer:** The Outback Chair Co Inc and all agents and representatives thereof cannot assume responsibility for special, indirect, or consequential damages or contingent liability for use of this product in a manner not expressly intended by the manufacturer.

**Warning:** Frame load limit 500 lbs.

This frame is not a swing and will not support perpendicular motion. Avoid wild and uncontrolled movement. Failure to comply could result in injury.

**Care and Maintenance:** Periodically inspect the welded joints around the foot brackets. Check that no parts have rusted through, especially on any welded area. Using a commercially available rust inhibitor will prolong the life of your frame. Spray periodically where the different sections join.

