



outbackchair
company


The freedom to float

outbackhaven

ASSEMBLY INSTRUCTIONS

(Outbackchair strongly advises having two people assemble this frame.)

1. Remove all seven parts from the hardware bag and follow the instructions.
2. Place all parts in an open area large enough for assembly.
3. Set the two welded bottom brackets (parts 1 and 2) about 5 feet apart from each other. Screw the back brace (part 3) into the receiving holes of the welded bottom brackets (parts 1 and 2) with the screws provided.
4. Place the "u"-shaped front connector bar (part 4) into the receiving ends of parts 1 and 2.
5. Place the two straight bars (parts 5 and 6) into the upright receiving ends of parts 1 and 2. (Second person may need to help with this stage.)
6. Place the top bracket (part 7) onto the ends of the uprights of part 5 and 6.
7. Bolt together all the parts with the supplied hardware, and thumb press the plastic covers over them.
8. Before placing your Outback Chair onto the frame, double check that the frame is on a stable and solid surface.

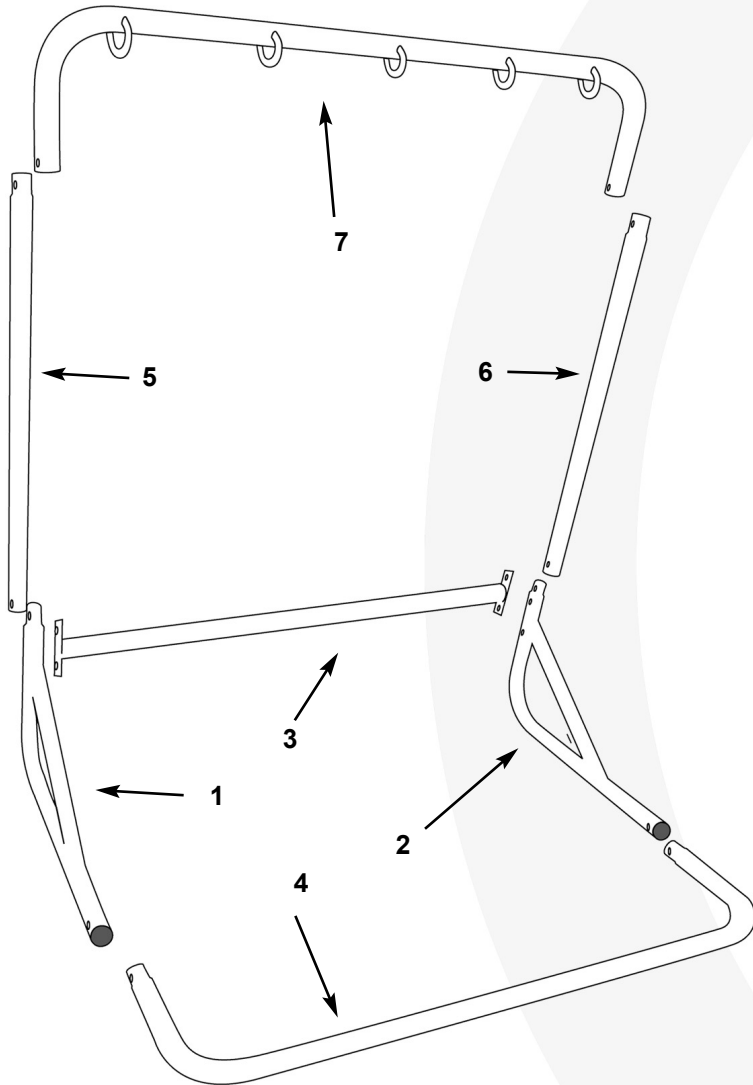

Warranty: Your outbackhaven frame has a full 2-year warranty. Please send in your warranty card or go on line to www.outbackchair.com and complete your warranty online.

Disclaimer: The Outback Chair Co Inc and all agents and representatives thereof cannot assume responsibility for special, indirect, or consequential damages or contingent liability for use of this product in a manner not expressly intended by the manufacturer.

Warning: Frame load limit 500lbs. Exercise caution when first sitting in the chair. Avoid horse play and excessive swinging - the frame is not intended for this. Failure to comply may result in severe injury.

Care and Maintenance: Periodically inspect the welded joints around the foot brackets. Check that no parts have rusted through, especially on any welded area. Using a commercially available rust inhibitor will prolong the life of your frame. Spray periodically on all welds, where the different sections join into the base, and the bolts.

