




outbackchair  
company

# The freedom to float

## outbackshelter

### ASSEMBLY INSTRUCTIONS

(You may need two people to assemble this frame.)

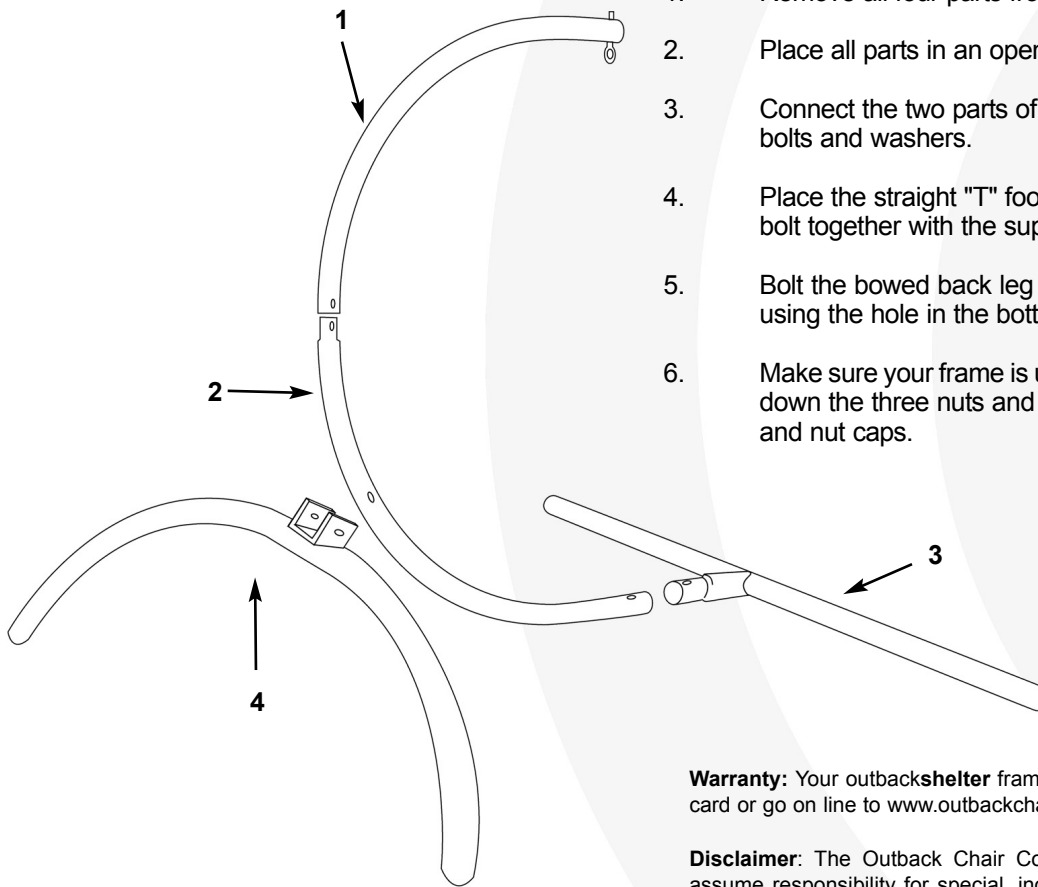

1. Remove all four parts from the hardware bag and follow the instructions.
2. Place all parts in an open area large enough for assembly.
3. Connect the two parts of the "C" (part 1 and 2) using the supplied nuts, bolts and washers.
4. Place the straight "T" foot (part 3) into the previously assembled "C" and bolt together with the supplied hardware.
5. Bolt the bowed back leg bracket (part 4) to the previously assembled "C" using the hole in the bottom part of the "C".
6. Make sure your frame is upright. Using a socket wrench or similar tool, bolt down the three nuts and bolts securely. Thumb press on the plastic bolt and nut caps.

**Warranty:** Your outbackshelter frame has a full 2-year warranty. Please send in your warranty card or go on line to [www.outbackchair.com](http://www.outbackchair.com) and complete your warrantee online.

**Disclaimer:** The Outback Chair Co Inc and all agents and representatives thereof cannot assume responsibility for special, indirect, or consequential damages or contingent liability for use of this product in a manner not expressly intended by the manufacturer.

**Warning:** This frame is not intended for swinging. Failure to comply may cause server injury. Weight capacity is 300 pounds. Regular inspection of the eye lag that supports the chair is strongly advised. This frame is built and designed for outback chairs.

**Care and Maintenance:** Periodically inspect the bolts for proper tension. Use a commercially available rust inhibitor on any surface scratches and on the bolts.

